

Lithium Iron (LiFePO₄) Battery

ALFP-48200(51.2V 200Ah)

Features

Longer Cycle Life: Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20 ~ 60°C

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Multi Protocol: The battery work well with multiple brands of inverters.



Dimension-mm

Application

- Indoor/outdoor telecom base stations
- Household energy storage system
- Smart transportation backup power supply

Specification

| Basic Parameters | Rated Voltage | 51.2V |
|--------------------------|----------------------------|----------------------------------|
| | Rated Capacity | 200Ah |
| | Rated Energy | 10240wh |
| | Combination Method | 1651P |
| | Cycle Life | ≥6000 cycles @80%DOD |
| | Self Discharge | 1%/months |
| | Efficiency of Charge | ≥97% |
| | Efficiency of Discharge | ≥98% |
| Charge | Charge Voltage | 57.6V |
| | Charge Current (Recomm.) | 40A |
| | Charge Current (Max.) | 100A |
| Discharge | Discharge Cut-off Voltage | 43.2V |
| | Discharge Current(Recomm.) | 100A |
| | Pulse Current | 170A (3S) |
| Environment | Charge Temperature | 0°C to 60°C |
| | Discharge Temperature | -20℃ to 60℃ |
| | Humidity | 5% to 95% |
| Physical Characteristics | IP Class | IP30 |
| | Case Materia | Metal |
| | Dimensions (mm) | 442*222*510mm |
| | Weight (kg) | 82kg |
| | Others(optional) | Anti-theft function, LCD display |

















Lithium Iron (LiFePO₄) Battery


ALFP-48200(51.2V 200Ah)

Different Rate Discharge Curve (25°C)




Discharge time


Different Temperature Discharge Curve (0.5C)

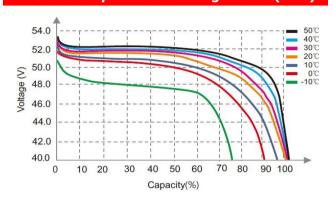


State of Charge Curve (0.5C, 25°C)

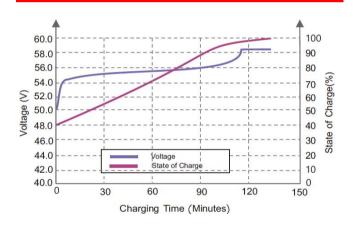


Charging Characteristics (0.5C, 25°C)

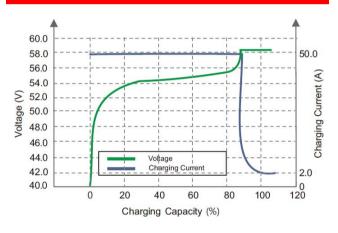

Different DOD Discharge Cycle Life Curve (0.5C)

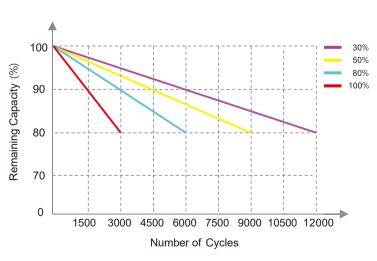

Different Temperature Self Discharge Curve

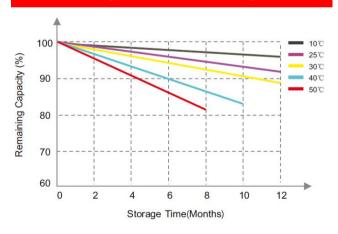



Add: High-tech Industrial Development Zone, Yingde City, Guangdong Province, China

Web: www.aokly-battery.com
Email: sales@aokly-battery.com

© 2024 AOKLY GROUP. All rights reserved.

Trademarks and logos are the property of AOKLY GROUP and its affiliates unless otherwise noted. Subject to revisions without prior notice.