

# Lithium Iron (LiFePO<sub>4</sub>) Battery

## ALFP-48100H(51.2V 100Ah)

#### **Features**

**Longer Cycle Life:** Offers up to 10 times longer cycle life and five times longer float/calendar life than lead acid battery, helping it minimize replacement cost and reduce total cost of ownership.


**Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A'drop in' replacement for lead acid batteries.

**Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20 ~ 60°C

**Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

Multi Protocol: The battery work well with multiple brands of inverters

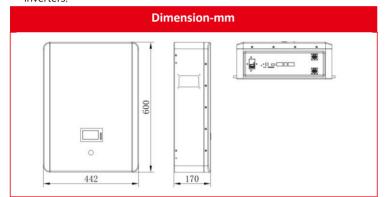



#### **Application**

- Indoor/outdoor telecom base stations
- Household energy storage system
- Smart transportation backup power supply

#### **Specification**

Basic Parameters	Rated Voltage	51.2V
	Rated Capacity	100Ah
	Rated Energy	5120wh
	Combination Method	16S1P
	Cycle Life	≥6000 cycles @80%DOD
	Self Discharge	1%/months
	Efficiency of Charge	≥97%
	Efficiency of Discharge	≥98%
Charge	Charge Voltage	57.6V
	Charge Current (Recomm.)	20A
	Charge Current (Max.)	100A
	Discharge Cut-off Voltage	43.2V
Discharge	Discharge Current(Recomm.)	100A
	Pulse Current	120A (3S)
	Charge Temperature	0°C to 60°C
Environment	Discharge Temperature	-20℃ to 60℃
	Humidity	5% to 95%
	IP Class	IP54
Physical Characteristics	Case Materia	Metal
	Dimensions ( mm )	600*442*170mm
	Weight ( kg )	50kg
	Others( optional )	WIFI, Bluetooth
















# Lithium Iron (LiFePO<sub>4</sub>) Battery


### ALFP-48100H(51.2V 100Ah)

#### **Different Rate Discharge Curve (25°C)**




Discharge time


#### **Different Temperature Discharge Curve (0.5C)**




#### State of Charge Curve (0.5C, 25°C)

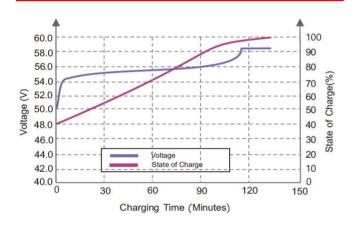

Charging Characteristics (0.5C, 25°C)




### **Different DOD Discharge Cycle Life Curve (0.5C)**

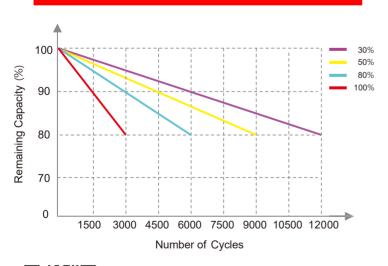

Add: High-tech Industrial Development Zone, Yingde City, Guangdong Province, China

Web: www.aokly-battery.com Email: sales@aokly-battery.com

### **Different Temperature Self Discharge Curve**



© 2024 AOKLY GROUP. All rights reserved.

Trademarks and logos are the property of AOKLY GROUP and its affiliates unless otherwise noted. Subject to revisions without prior notice.